



tecnoswitch


Dimmer a pulsante WIFI + BLUETOOTH per strip led gestibile tramite app

PUSH-BUTTON LED STRIP
DIMMER WITH WIFI + BLUETOOTH
CONTROLLABLE BY APP



Tensioni in ingresso 12/24/36/48 Vdc
Tensioni in uscita 12/24 Vdc (8A max), 36 Vdc (5A max), 48 Vdc (4A max)
Potenza massima in uscita 200W
Corrente massima di uscita 8A
Tipo dimmerazione PWM
Range di dimmerazione 4-100%, personalizzabile da app
Stato dopo ripristino alimentazione: Spento
Connettività Wi-Fi 2.4 GHz b/g/n + Bluetooth 4.2 low energy
Gestibile tramite app "Tuya smart o Smartlife" per Android e iOS
Supporto vocale Google assistant e Alexa
Terminali di connessione a vite
Installazione in cassetta 503

Input voltages 12/24/36/48 Vdc
Output voltages 12/24 Vdc (8A max), 36 Vdc (5A max), 48 Vdc (4A max)
Max output power 200W
Max output current 8A
PWM dimming type
Dimming range 4-100%, settable by app
Wake-up mode: OFF
Wi-Fi 2.4 GHz b/g/n + Bluetooth 4.2 low energy connectivity
Controllable by app "Tuya smart or Smartlife" for Android and iOS
Google assistant and Alexa voice control
Screw connection terminals
Recessed installation in 503 standard box

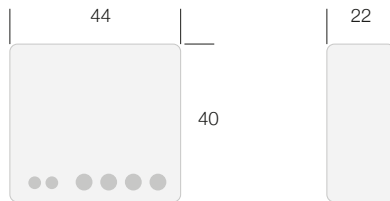

CODICE	TENSIONE IN INGRESSO	TENSIONE IN USCITA	POTENZA	CORRENTE MASSIMA DI USCITA	PESO
CODE	INPUT VOLTAGE	OUTPUT VOLTAGE	POWER	MAX OUTPUT POWER	WEIGHT
	Vdc	Vdc	W	A	gr
DI005CW	12 - 24 - 36 - 48	12 /24 (8A max) · 36 (5A max) · 48 (4A max)	200	8	40